


Φ120





Motor Type : AC External Rotor Motor
 Impeller Material :Galvanized Metal Sheet
 Protection Class : IP44
 Insulation Class : F
 Certification : CE/CCC
 Operation Temperature : - 30 °C ~ +60 °C
 Protection : Thermal Overload Protector (TOP)

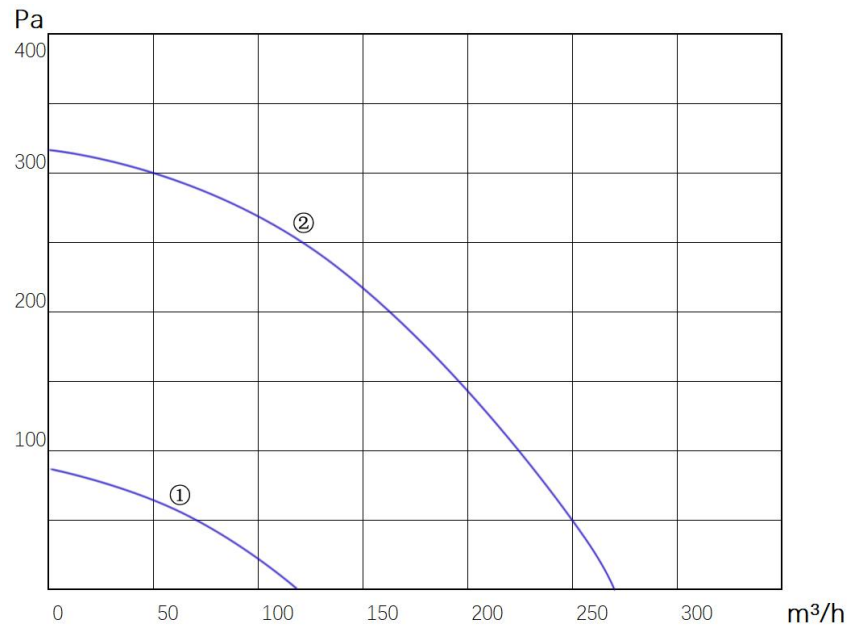

■ Technical Specification


Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-120-092SS-01	220-240	50/60	26	0.12	1410	110	65	2	①
LWFA2E-120-092SS-02	220-240	50/60	50	0.22	2610	265	67	2	②

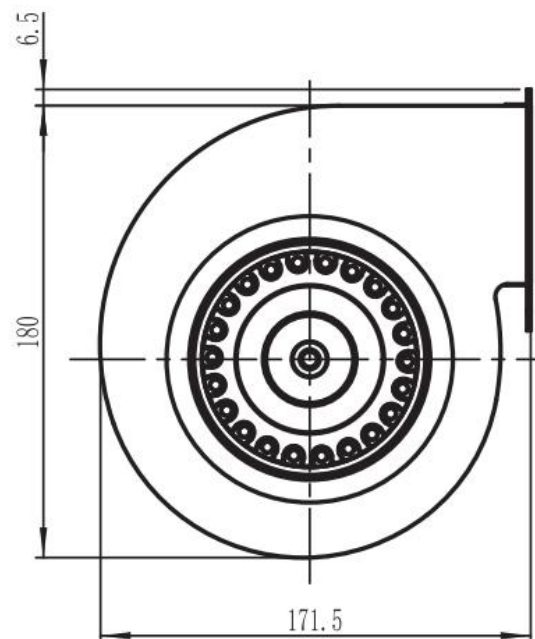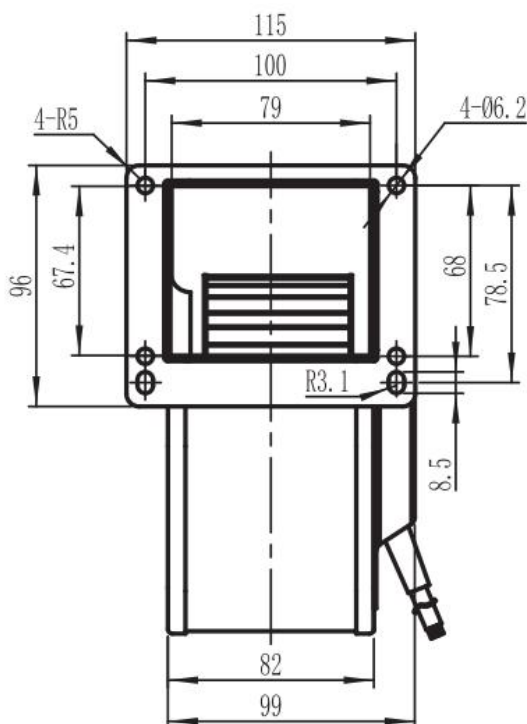

Φ133





Motor Type : AC External Rotor Motor
 Impeller Material :Galvanized Metal Sheet
 Protection Class : IP44
 Insulation Class : F
 Certification : CE/CCC
 Operation Temperature : - 30 °C ~ +60 °C
 Protection : Thermal Overload Protector (TOP)

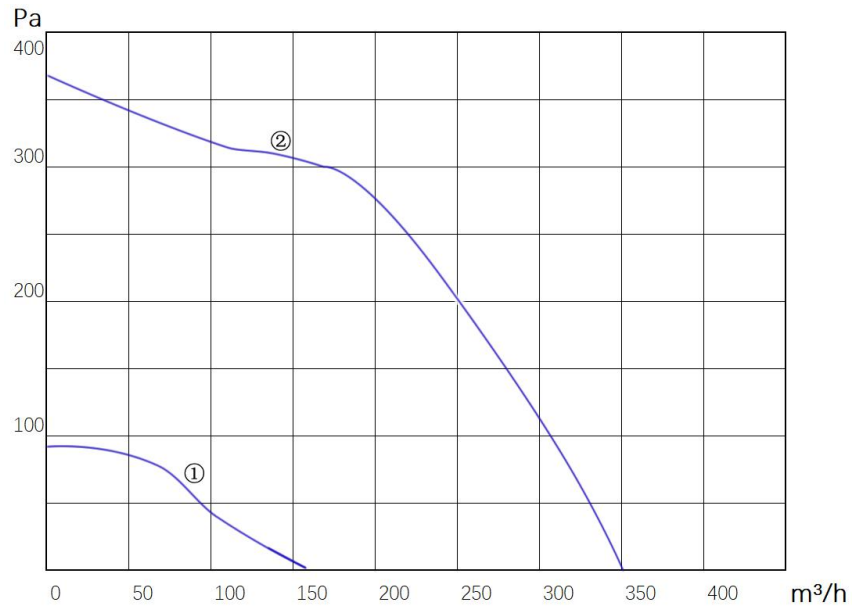

■ Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-133-092SS-01	220-240	50/60	37	0.18	1410	230	60	2	①
LWFA2E-133-092SS-01	220-240	50/60	104	0.50	2510	330	68	3	②

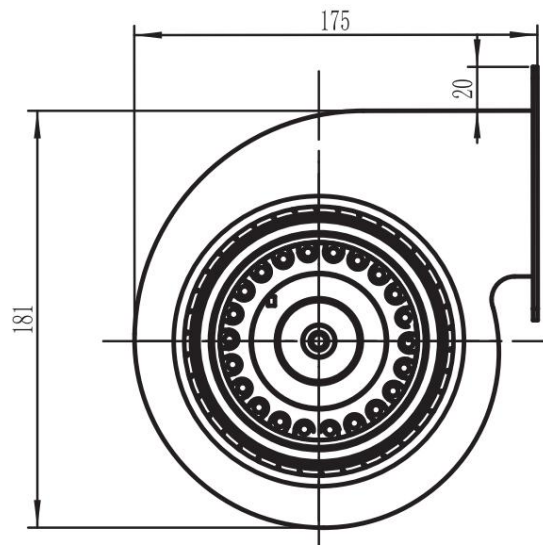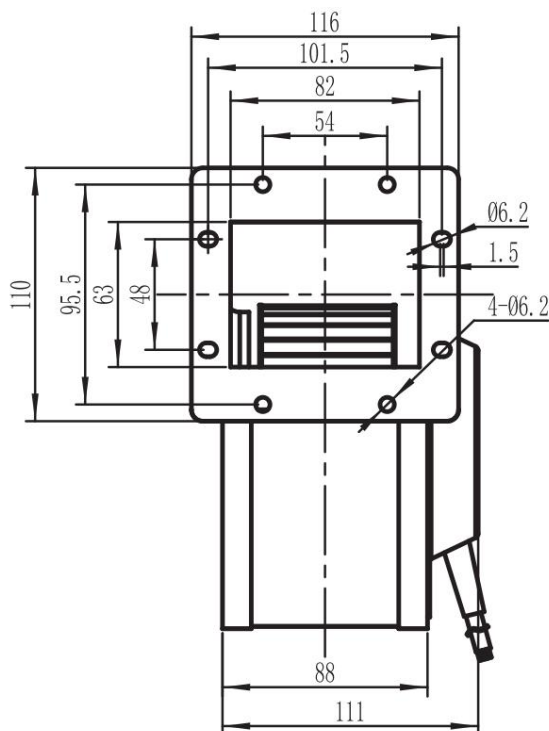

CENTRIFUGAL FAN - FORWARD AC

Φ133



Motor Type : AC External Rotor Motor

Impeller Material :Galvanized Metal Sheet


Protection Class : IP44

Insulation Class : F

Certification : CE/CCC



Operation Temperature : - 25 °C ~ +60 °C

Protection : Thermal Overload Protector (TOP)

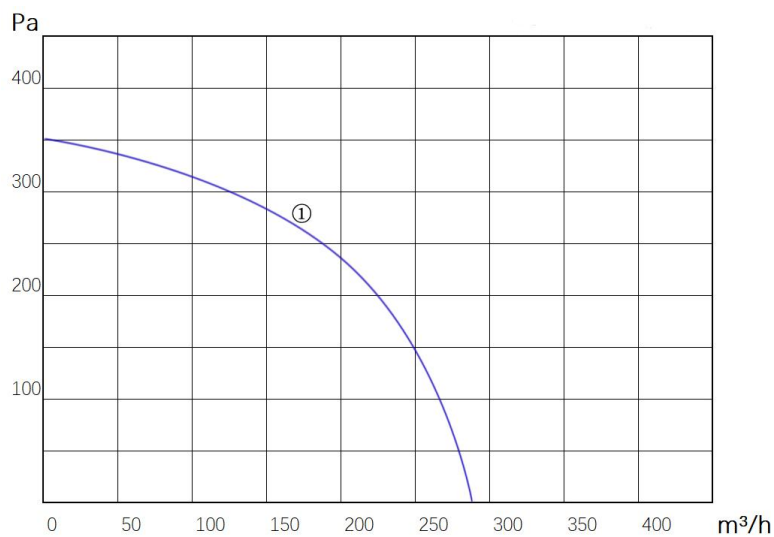


■ Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-133-092SS-02	220-240	50	83	0.37	1850	290	61	2	①

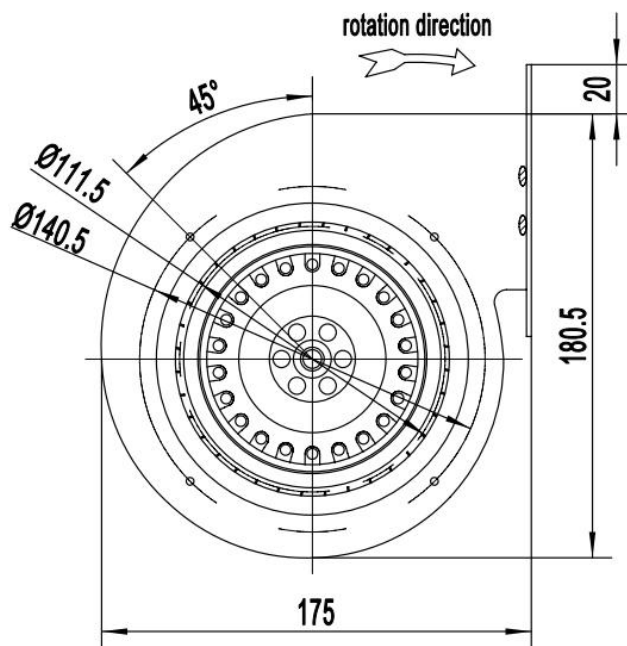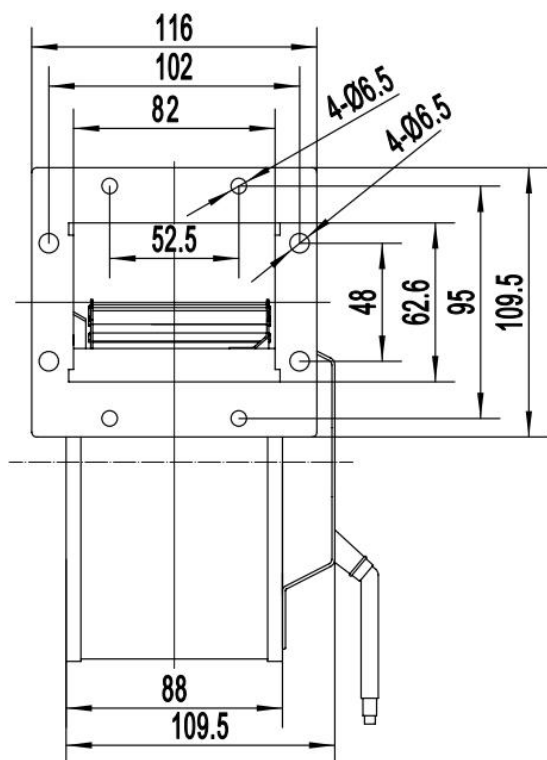

Φ140

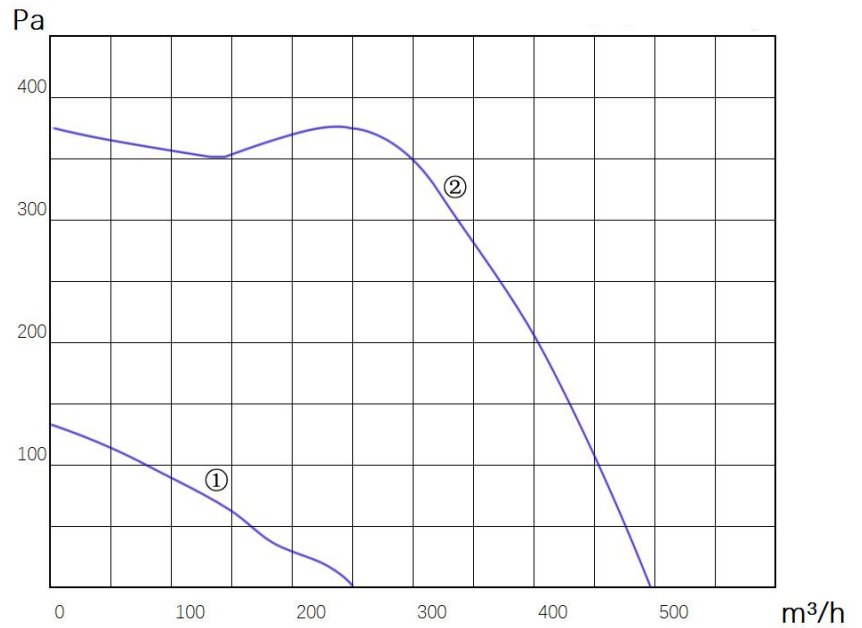

Motor Type : AC External Rotor Motor

Impeller Material :Galvanized Metal Sheet

Protection Class : IP44

Insulation Class : F



Certification : CE/CCC

Operation Temperature : - 25 °C ~ +60 °C

Protection : Thermal Overload Protector (TOP)

■ Technical Specification


Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-140-092SS-01	220-240	50/60	35	0.18	1410	250	62	2	①
LWFA2E-140-092SS-01	220-240	50/60	95	0.44	2700	500	71	4	②

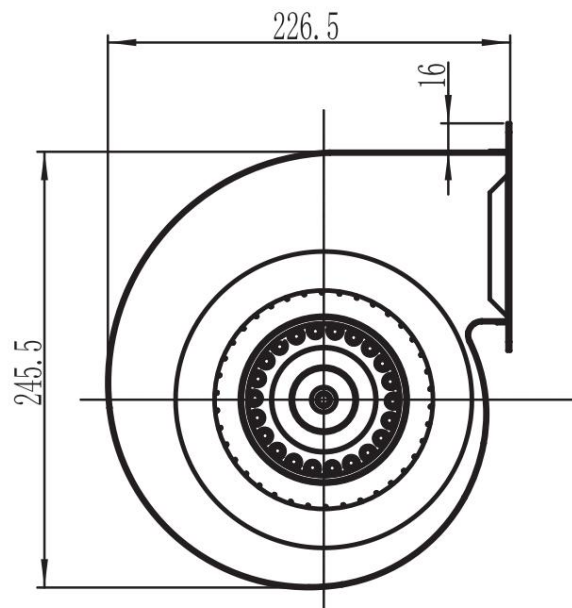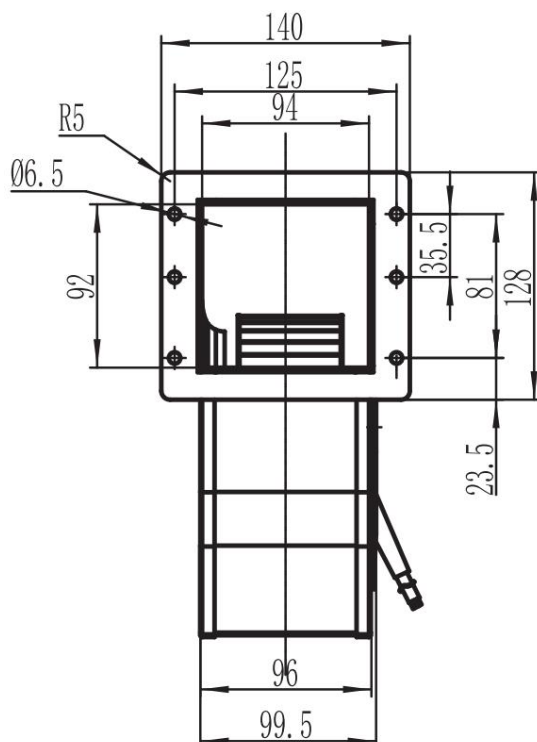

Φ150




Motor Type : AC External Rotor Motor
 Impeller Material :Galvanized Metal Sheet
 Protection Class : IP44
 Insulation Class : F
 Certification : CE/CCC
 Operation Temperature : - 25 °C ~ +60 °C
 Protection : Thermal Overload Protector (TOP)

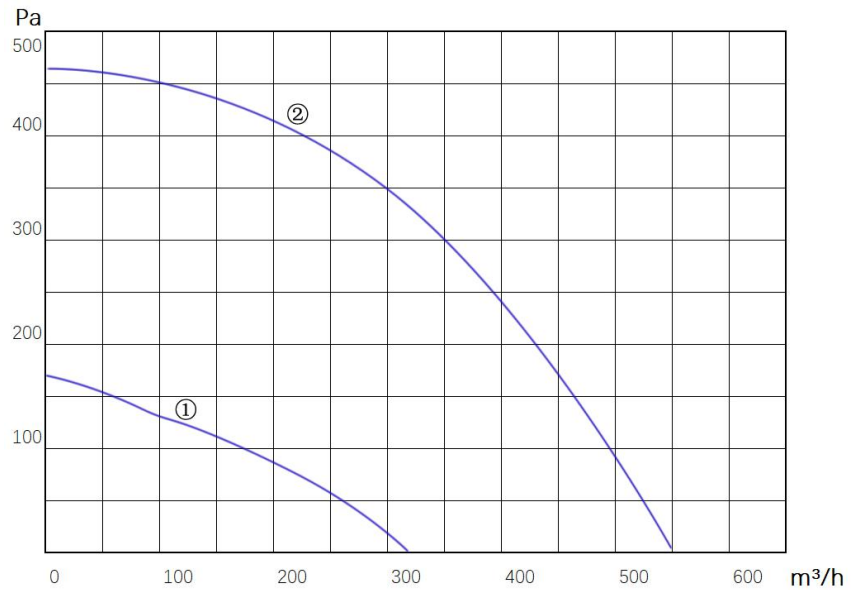

■ Technical Specification


Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-150-092SS-01	220-240	50/60	64	0.30	1410	320	62	2	①
LWFA2E-150-092SS-01	220-240	50/60	178	0.80	2250	550	71	4	②

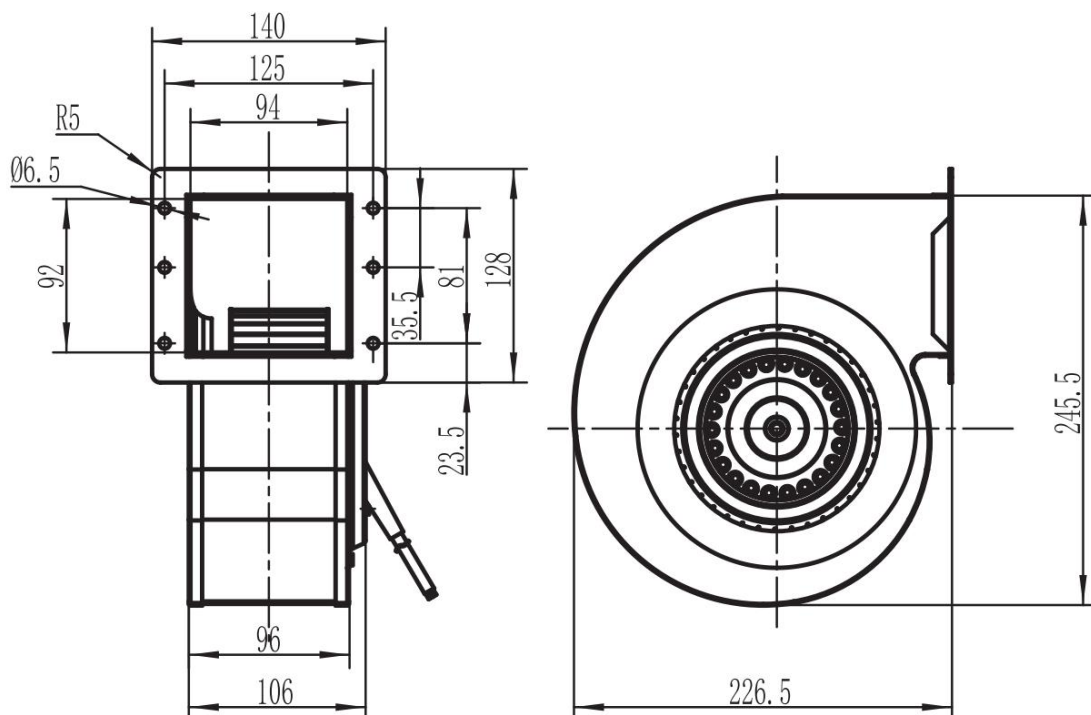

Φ160




Motor Type : AC External Rotor Motor
 Impeller Material :Galvanized Metal Sheet
 Protection Class : IP44
 Insulation Class : F
 Certification : CE/CCC
 Operation Temperature : - 25 °C ~ +60 °C
 Protection : Thermal Overload Protector (TOP)

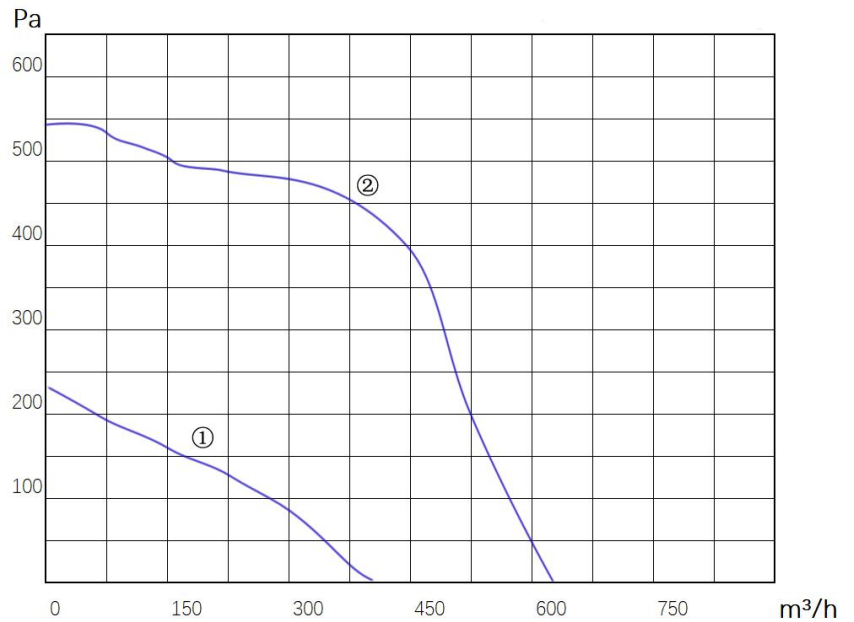


■ Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-160-092SS-01	220-240	50/60	74	0.38	1410	400	63	2	①
LWFA2E-160-092SS-01	220-240	50/60	247	1.15	2000	620	70	6	②

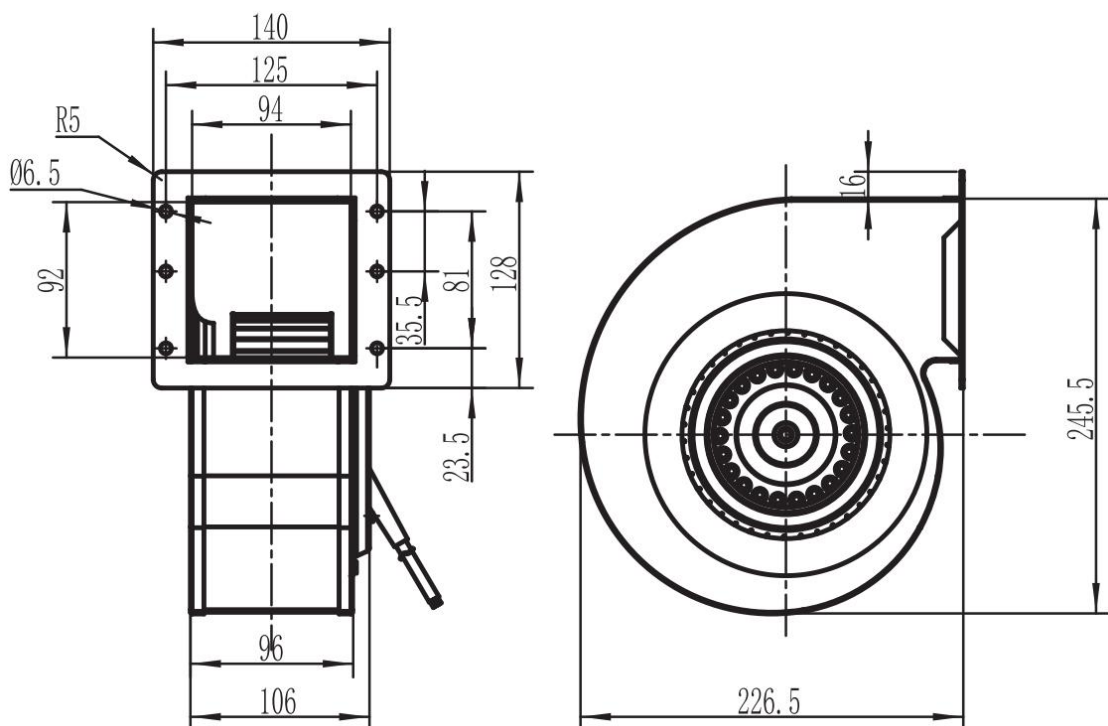

CENTRIFUGAL FAN - FORWARD AC


Φ180

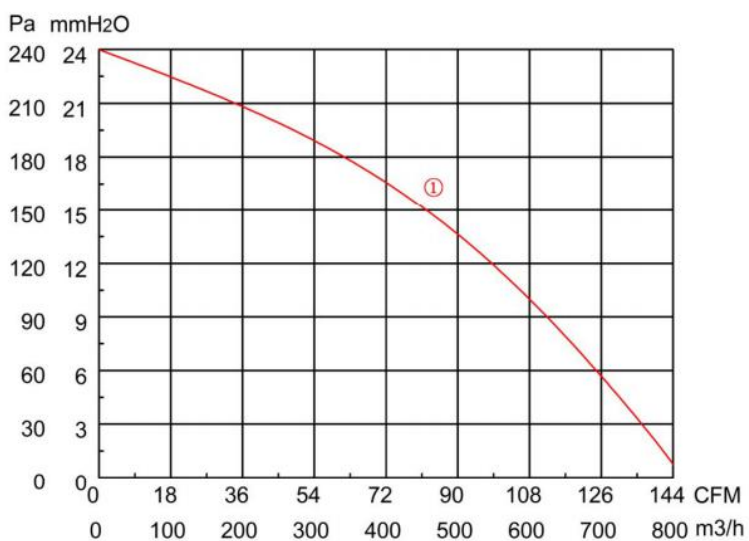

Motor Type : AC External Rotor Motor
 Impeller Material : Galvanized Metal Sheet
 Protection Class : IP44
 Insulation Class : F
 Certification : CE/CCC
 Operation Temperature : - 25 °C ~ +60 °C
 Protection : Thermal Overload Protector (TOP)

■ Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m ³ /h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-180-102SS-01	220-240	50/60	150	0.65	1400	810	63	4	①
LWFA4D-180-102SS-01	220-240	50/60	150	0.36	1400	810	63	/	

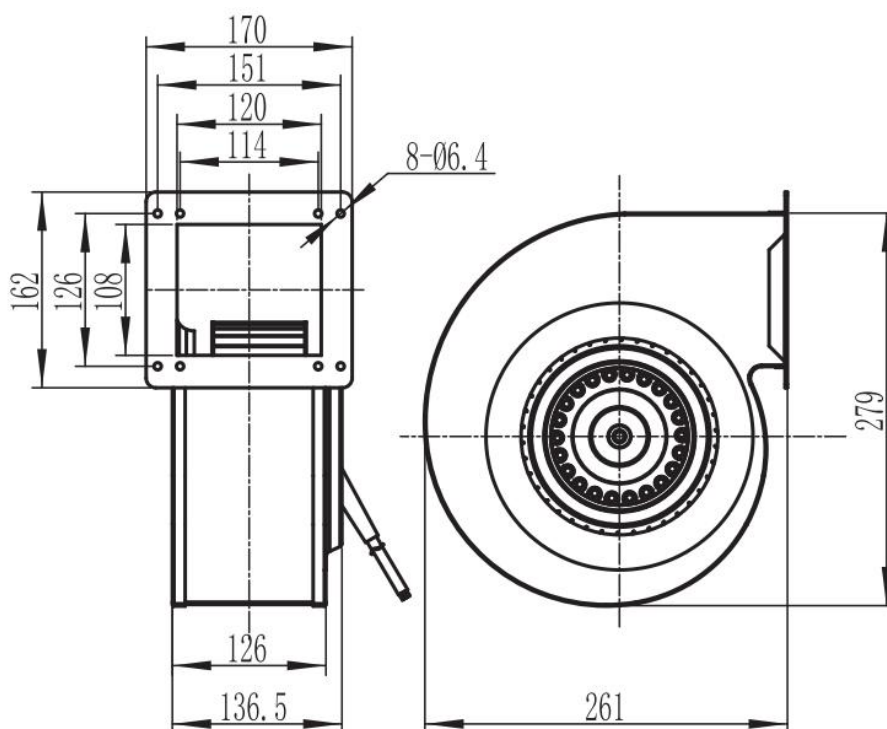


CENTRIFUGAL FAN - FORWARD AC

Φ200





Motor Type : AC External Rotor Motor
Impeller Material :Galvanized Metal Sheet
Protection Class : IP44
Insulation Class : F
Certification : CE/CCC
Operation Temperature : - 25 °C ~ +60 °C
Protection : Thermal Overload Protector (TOP)

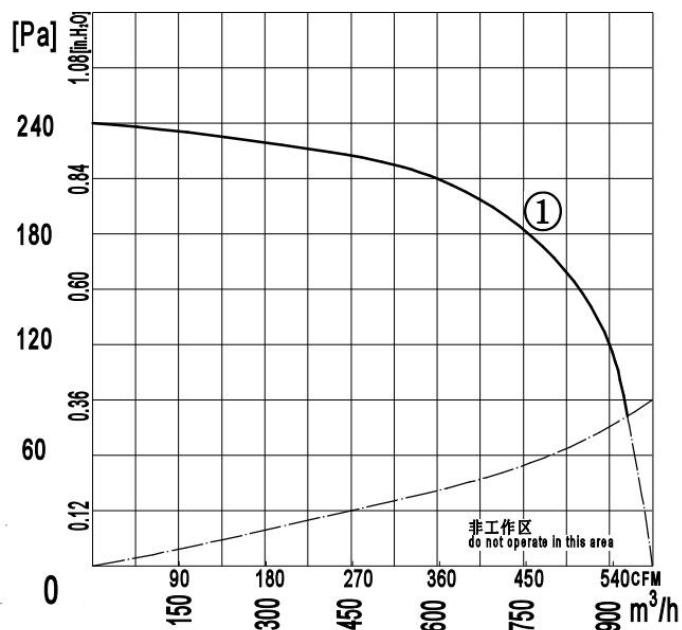

Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-200-102SS-01	220-240	50	200	0.95	1300	1000	66	6	①
LWFA4D-200-102SS-01	380-400	50	200	0.85	1300	1000	66	/	①

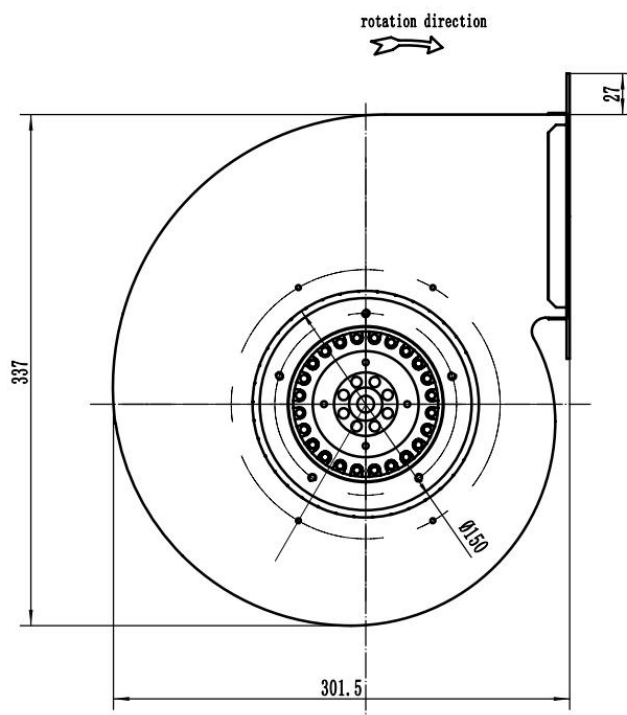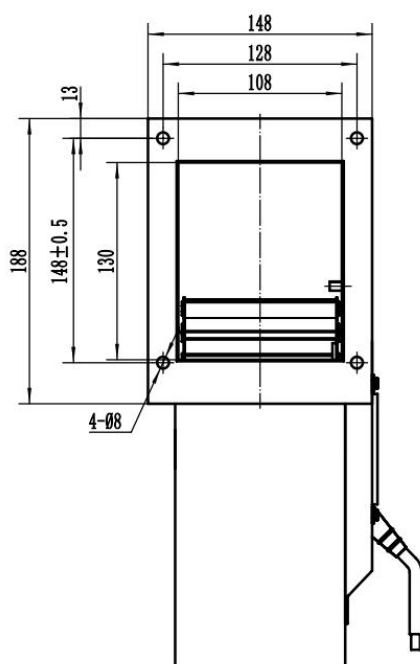


CENTRIFUGAL FAN - FORWARD AC

Φ225




Motor Type : AC External Rotor Motor
Impeller Material :Galvanized Metal Sheet
Protection Class : IP44
Insulation Class : F
Certification : CE/CCC
Operation Temperature : - 25 °C ~ +60 °C
Protection : Thermal Overload Protector (TOP)

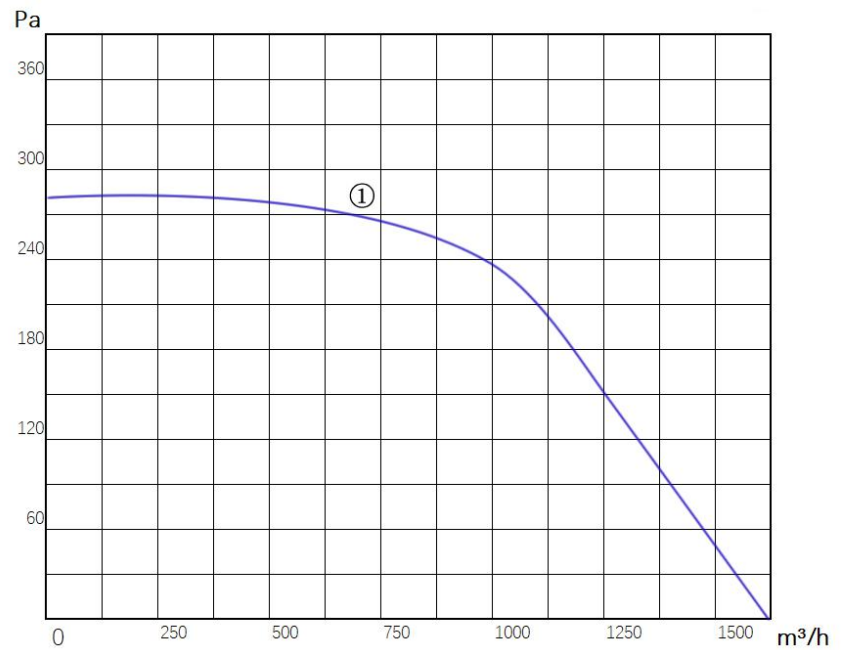

■ Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4E-225-137SS-01	220-240	50	200	1.9	1390	1600	73	12	①
LWFA4D-225-137SS-01	380-400	50	200	1.1	1390	1600	73	/	①

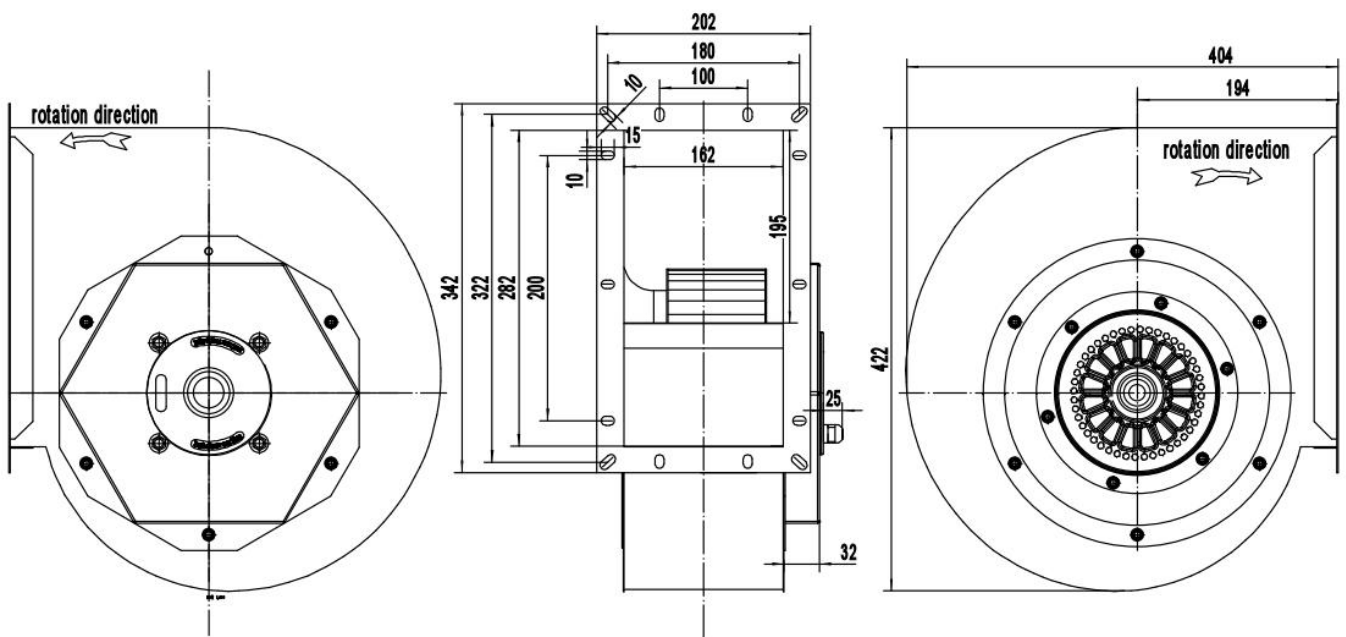


CENTRIFUGAL FAN - FORWARD AC

Φ250




Motor Type : AC External Rotor Motor
Impeller Material :Galvanized Metal Sheet
Protection Class : IP44
Insulation Class : F
Certification : CE/CCC
Operation Temperature : - 25 °C ~ +60 °C
Protection : Thermal Overload Protector (TOP)

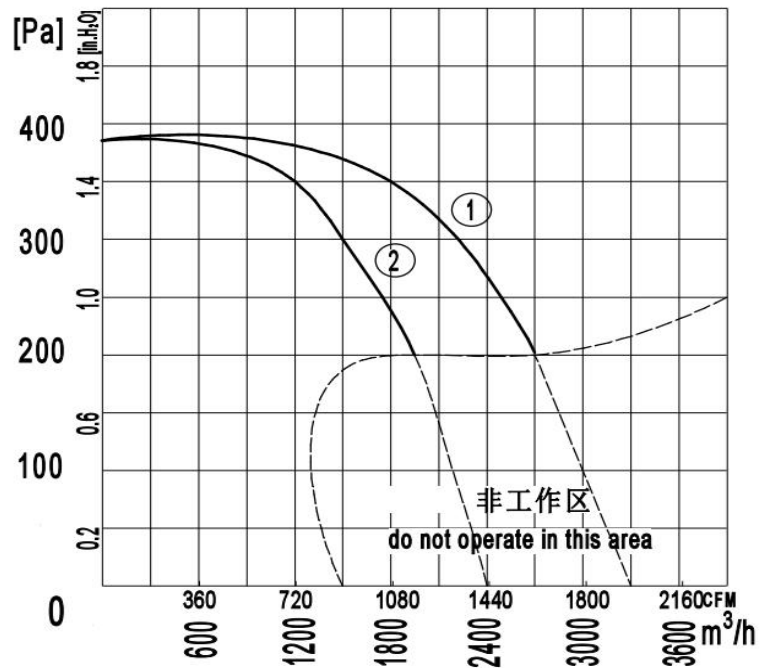

Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4D-250-137SS-01	380-400	50	850	1.6	1350	3300	80	/	①
LWFA4D-250-137SS-02	380-400	50	630	1.2	1300	2400	74	/	②

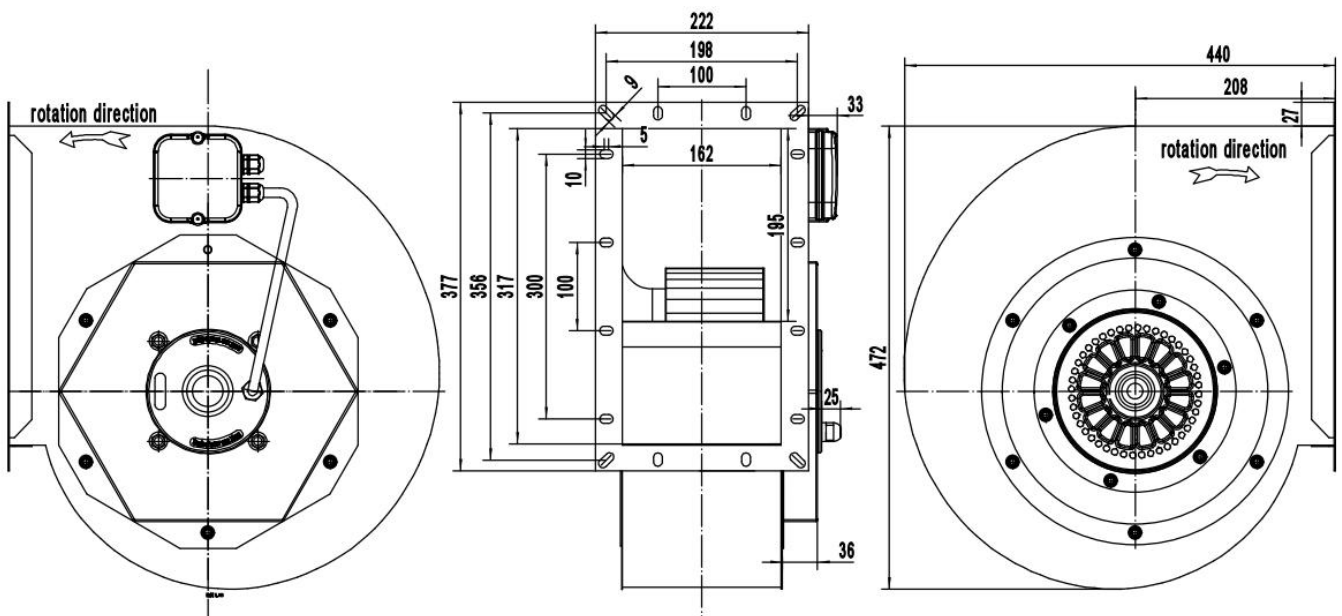


CENTRIFUGAL FAN - FORWARD AC

Φ280




Motor Type : AC External Rotor Motor
Impeller Material :Galvanized Metal Sheet
Protection Class : IP44
Insulation Class : F
Certification : CE/CCC
Operation Temperature : - 25 °C ~ +60 °C
Protection : Thermal Overload Protector (TOP)

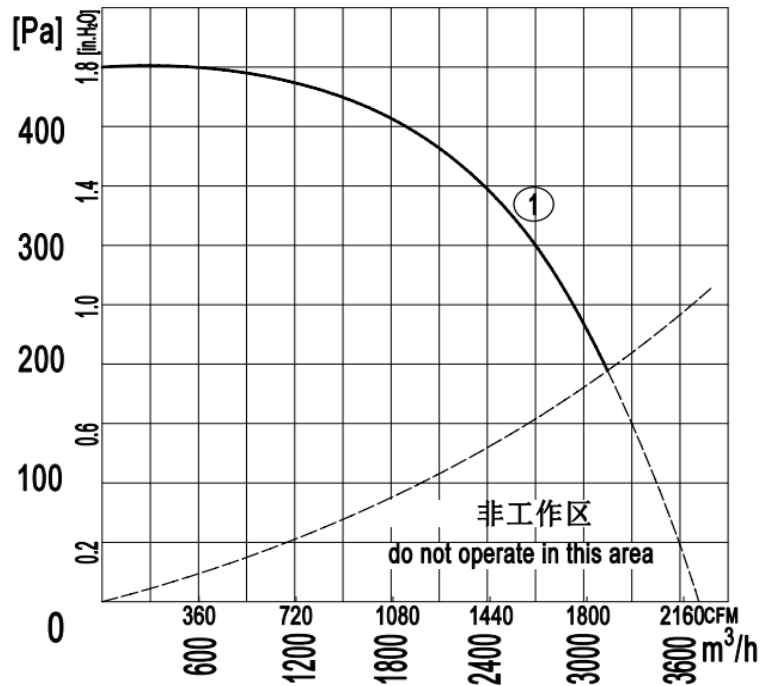

Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4D-280-180SS-01	380-400	50	1400	2.5	1400	3700	82	/	①

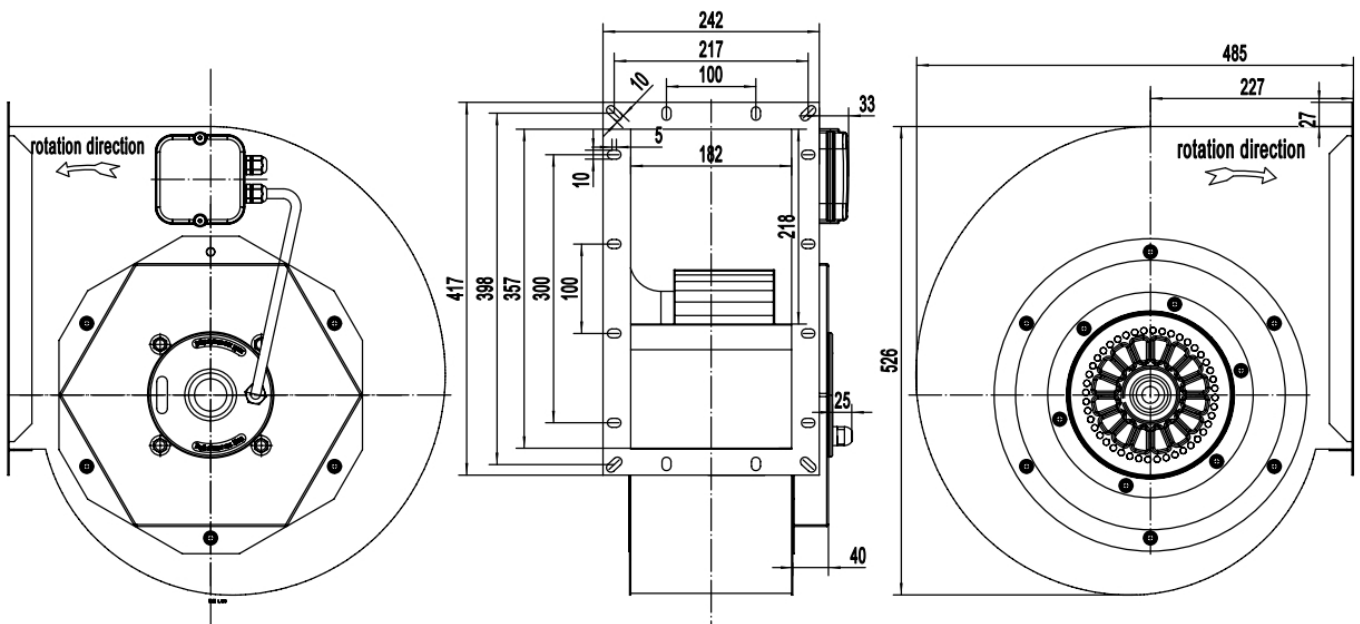


CENTRIFUGAL FAN - FORWARD AC

Φ315



Motor Type : AC External Rotor Motor
Impeller Material :Galvanized Metal Sheet
Protection Class : IP44
Insulation Class : F
Certification : CE/CCC
Operation Temperature : - 25 °C ~ +60 °C
Protection : Thermal Overload Protector (TOP)

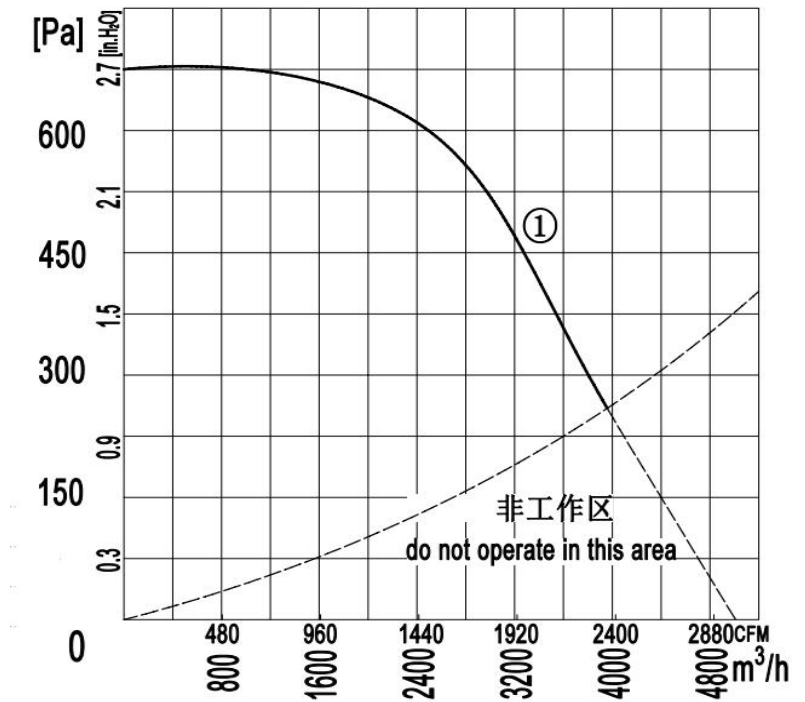

Technical Specification

Model	Voltage (v)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Noise (dBA)	Capacitor (μF)	Curve
LWFA4D-315-180SS-01	380-400	50	2200	3.7	1350	5000	85	/	①

